


1. USB2.0 or Higher.




2. Set the USB FileSys to **FAT32**.



3. Create a new folder named "upgrade".

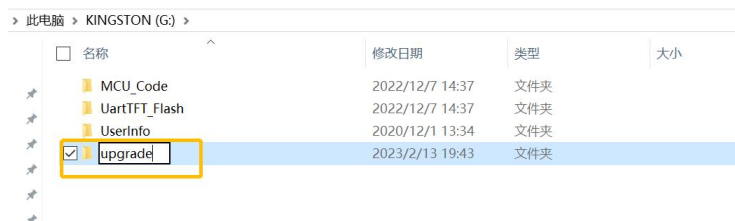

4.put the firmware into the folder.

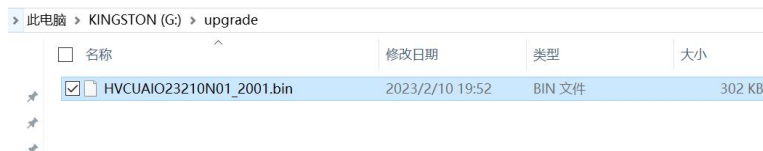

5. Insert the USB flash drive into the USB port of the battery. They wait about 30s until the LED of the battery keep light without blink, unplug the USB drive.